

CE6409 中文说明书 尺寸 535.5 X 255 MM

1 入門指南

歡迎

非常感謝您選購Uniden產品。

備註：此說明書中插圖僅供示意，與實物可能有差異。


功能描述

- DTMF/FSK雙制式來電顯示
- 68組（16位）來電及來電時間記錄
- 15組（30位）去電及去電時間記錄
- 2組（16位）單鍵記憶
- 10組（16位）雙鍵記憶
- 5位出局碼設置
- 16位LCD顯示，日期、時鐘及星期顯示
- 5級亮度調節
- FLASH時間600/300/100ms可選
- 免提功能
- Mute功能
- Tone/Pulse撥號功能

注意：本電話機有來電顯示功能，但必須向你的電訊因網服務商申請


配件清單(包含)

1. 底座
2. 手柄
3. 電話直線
4. 曲線
5. 說明書

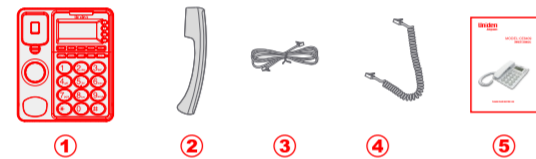

備註：如發現配件缺失，請聯繫當地購買商。

功能指示

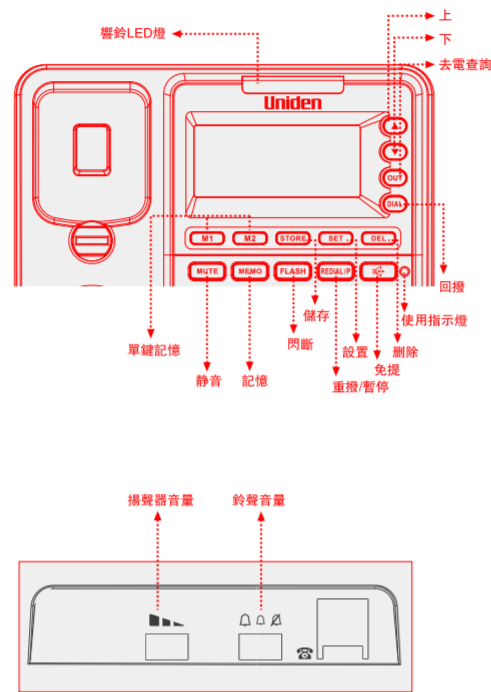

LCD 顯示



- 1 00:00:00 時間，日期
- 2 00:00:00 來，去電數量
- 3 NEW REP MAIL 新來電，重復，郵件
- 4 SUN MON TUE WED THU FRI SAT 星期
- 5 0000000000000000 號碼顯示

2 設置

設置日期/時間

在掛機或摘機狀態下

1. 長按【SET】鍵2秒進入設置狀態，LCD顯示“SET 1 DATE”
2. 按【SET】鍵進入日期/時間設置，光標在年的位置閃爍
3. 按數字鍵輸入完成後，光標自動跳到下一位，使用【▲▼】鍵可改變光標所在的位置
4. 年份設置完成後，光標自動跳到月份的十位，月的設置修改方法與年的設置相同，即用數字鍵輸入，如果設置錯誤將有錯誤提示音。設置月份後，光標自動跳到日期的十位上，使用【▲▼】鍵可改變光標所在的位置。
5. 完成日期設置後，同樣光標會自動跳到小時和分鐘的位置上。設置方法同年月
6. 設置完成後，按【SET】鍵退出日期/時間設置狀態，進入下一級菜單。（設置完成後，沒有按【SET】鍵退出，超時退出，話機會將之前的設置存儲起來）
7. 按【FLASH】鍵退出設置狀態，LCD顯示屏會自動顯示對應的時間和日期，但不顯示年份。

設置出局碼

在掛機或摘機狀態下

1. 長按【SET】鍵2秒進入設置狀態，LCD顯示“SET 1 DATE”
2. 按【▲】或【▼】鍵至LCD顯示“SET 2 PCODE”
3. 按【SET】鍵進入出局碼的設置，此時LCD會顯示“PCODE-----”（5位空位）或已設置的（1-5位）出局碼，第一個號碼位閃爍
4. 按數字鍵（0-9）輸入或修改出局碼，完成第一位設置後光標會自動進入第二位，以此類推完成5位設置，可以使用【▲▼】鍵改變光標所在的位置
5. 如果輸入有誤，在光標閃爍位置，按【DEL】鍵刪除錯誤的輸入
6. 按【SET】鍵確認，並進入下一設置。再按【FLASH】鍵退出設置狀態。

撥號方式

在掛機或摘機狀態下

1. 長按【SET】鍵2秒進入設置狀態，LCD顯示“SET 1 DATE”
2. 按【▲】或【▼】鍵至LCD顯示“SET 3 T-P”
3. 按【SET】鍵進入撥號方式設置狀態，此時LCD會顯示“TONE”，表示當前撥號方式為音頻撥號
4. 按【▲】或【▼】鍵進行選擇“TONE”或“PULSE”撥號方式
5. 按【SET】鍵確認，並進入下一設置。再按【FLASH】鍵退出設置狀態。

FLASH時間設置

在掛機或摘機狀態下

1. 長按【SET】鍵2秒進入設置狀態，LCD顯示“SET 1 DATE”
2. 按【▲】或【▼】鍵至LCD顯示“SET 4 FLASH”
3. 按【SET】鍵進入閃斷時間設置，LCD顯示“FLASH 3 600”，表示初始閃斷時間為600ms
4. 按【▲】或【▼】鍵選擇所需要的閃斷時間，共有100/300/600ms三種選擇
5. 按【SET】鍵確認，再按【FLASH】鍵退出設置狀態。

3 掛機操作

來電接收

收到FSK或DTMF來電後，話機自動偵測並顯示來電號碼，同時顯示來電的日期、時間，並記錄這是第幾個來電，若是FSK制式，來電顯示信號會自動刷新月、日以及時間的設置，而年的設置不變。對於DTMF制式，所有設置均不被改變。由於DTMF信號只含有來電號碼，不含來電日期及時間，因此，系統收到DTMF來電號碼時，會將已設置的日期及時間賦予該來電號碼。LCD同時顯示來電序號。若是新號碼，會有“NEW”標志同時出現。若是已有號碼，則會有“REP”標志出現。若是來電保密，則LCD會顯示“---P---”。若來電出範圍，則顯示“---O---”。若是來電信號不正確則顯示“---E---”。收到新來電後話機會保持顯示新來電號碼及來電時間1分鐘，直到接聽或有按鍵操作。

來電查詢

按【▲】或【▼】鍵進入來電查詢狀態，按【▲】或【▼】鍵可向上或向下翻查，LCD顯示來電的號碼、日期及時間等信息。長按【▲】或【▼】鍵超過2秒，可進行快速翻查。

來電編輯及回撥

號碼編輯：

添加出局碼(假設PCODE碼是0755)
翻查到一組來電(如123456789)，按#鍵將從號碼第一位依次刪除；
長按0，在號碼前面加PCODE碼(即0755123456789)，如果此時輸入數字10，將數字加在來電號碼與PCODE碼之間(即075510123456789)；按#鍵，可撤消之前的操作，恢復原始號碼(即123456789)。按【DIAL】鍵、【◀】或摘機即撥出所編輯的號碼。

直接添加號碼

翻查到一組來電(如123456789)，此時可直接輸入數字(如10)，將數字加在來電號碼前(即10123456789)，按#鍵，可撤消之前的操作，恢復原始號碼(即123456789)。按【DIAL】鍵、【◀】或摘機即撥出所編輯的號碼。

注：當號碼=6位時，可以在號碼前加數字，但不響應#鍵；當號碼<6位時，不具備這種調整功能。

查詢到來電後，直接按【DIAL】鍵、【◀】或摘機，即可對來電號碼進行回撥；連續按兩次【DIAL】鍵，話機會在來電號碼首位前自動加“0”進行回撥。

3 掛機操作

去電查詢

按【OUT】鍵進入去電查詢狀態，繼續按【OUT】鍵可循環查詢最近撥出的號碼及撥出時間。長按【OUT】鍵超過2秒進行快速翻查。按【DIAL】鍵，顯示的去電號碼將被撥打出去，號碼的位數超過LCD顯示支持的位數，話機將分屏顯示號碼，用【▲】或【▼】鍵進行換屏查看。去電號碼最多可以存儲15組，每組30位。

掛機預撥號

在掛機狀態下，通過各數字鍵輸入要撥出號碼，在未輸入號碼之前，可長按【0】鍵2s，將會自動輸入已設置的PCODE出局碼。如在輸入號碼過程中按【REDIAL/P】鍵，號碼中會顯示“P”，在號碼撥出後將會暫停3.6秒。若輸入有錯誤，可以用【DEL】鍵修改，全部輸入完成以後，按【DIAL】鍵或摘機撥出。

刪除鍵

在預撥號狀態，【DEL】鍵用來刪除錯誤輸入的號碼(改錯)；在翻查來電或去電號碼狀態，【DEL】鍵用來刪除該條來電或去電，長按【DEL】鍵2秒，LCD顯示“DELETE ALL”，再按【DEL】鍵確認可刪除所有來電或去電號碼。

單、雙鍵記憶

在掛機或摘機狀態下

1. 按【STORE】鍵，LCD顯示“STORE”
2. 按數字鍵輸入號碼或按【▲▼】或【OUT】鍵翻查來電或去電號碼
3. 再按【STORE】鍵LCD顯示“STORE IN”
4. 按單鍵記憶MX(X=1-2)或按數字鍵0-9存入相應的雙鍵記憶鍵。

撥出單、雙鍵記憶號碼

-掛機狀態，按MX(X=1-2)鍵或按【MEMO】鍵+數字鍵(0-9)，則顯示相應的存儲號碼，按【DIAL】、【◀】或摘機，話機會自動撥出該組號碼。

-摘機狀態，按MX(X=1-2)鍵或按【MEMO】鍵+數字鍵(0-9)將立即撥出該組號碼。

4 摘機操作

來電或去電查詢

摘機後可用【▲】或【▼】鍵查詢來電，也可用【OUT】鍵查詢去電。

MUTE功能

1. 在摘機狀態，使用者可以按【MUTE】鍵進入靜音功能。當靜音時，LCD右上角會顯示“MUTE”。再次按【MUTE】鍵退出靜音功能恢復正常通話。
2. 在掛機狀態下，使用者可以按【MUTE】鍵選擇LCD亮度(共有5級亮度調節，默認為3級)。

重撥

摘機狀態，無號碼撥出前，按【REDIAL/P】鍵，立即撥出上一次撥出的號碼。

5 WARRANTY CARD/保修卡

ustelecom | 美國通訊有限公司
PRODUCTS - WARRANTY CARD
產品保養證

姓名 Name: _____

電話 Telephone: _____

型號 Model: _____

零售商 Dealer: _____

購買日期 Date of Purchase: _____

機身編號 Serial No.: _____

辦公時間

星期一至五(公眾假期休息)
上午十時至下午十二時; 下午二時至五時

Office Hours

Mon - Fri (Except for Public Holidays)

10:00am - 12:00am; 2:00pm - 5:00pm

維修中心 SERVICE CENTRE

香港紅磡暢通道1號中旅貨運物流中心 6樓


(必須使用客電梯)

6/F, China Travel (Cargo) Logistics Centre,

1 Cheong Tung Road, Hung Hom, Kln.

(Use Guest Lift Only)

TEL: (852) 2185 6283



保養說明

CUSTOMER'S COPY
用戶存根/不需寄回

此保養證只適用於香港
For Hong Kong Only

保養條款

1. 此保養證有效期為購買當日起計12個月。
2. 此保養證只適用於原本購買產品之顧客及不可轉讓。
3. 保養服務只限於保養期內，請出示保養證，發票正本及全套產品一併交回。客戶須負責將產品送往本公司的費用。
4. 零件及配件(火牛、電源線及電芯)之保養期為購買後90天，包括對電池的蓄電量低於額定功率的80%以下及電池洩漏這兩種情況。
5. 保養證將不包括由下列情況所導致的損壞：(a) 產品曾經改變、修改及非由本公司修理過；(b) 正常磨損；(c) 不當裝配、使用、誤用、意外或疏忽；(d) 接觸水、雨、沙、塵埃、汗水、太過潮濕或接近熱源；(e) 使用其他品牌的配件。
6. 此保養證只在香港有效。
7. 由通知之日期起2個月內沒有領回已維修機件，公司有權自行處理有關機件，逾期失機，恕不負責。
8. 本公司有權隨時修訂保養條款，而無須先行通知客戶。

Warranty Conditions

1. This warranty commences on the date of original purchase and expires 12 months from that date.
2. This warranty extends only to the first consumer purchaser and is not transferable.
3. Warranty service will only be provided within the warranty period. To obtain service, the complete set of product shall be brought to our service centre at the purchaser's own expense, together with this warranty card and the original purchase invoice.
4. The warranty period for accessories (battery, adaptor, line cord) is 90 days commencing from the date of original purchase. Only batteries whose fully charged capacity falls below 80% of their rated capacity and batteries that leak are covered.
5. The warranty does not cover defects or damage result from (a) modification, alteration or repair by persons other than the authorized personnel of the company; (b) normal wear and tear; (c) improper installation and operation, misuse, accident, negligence; (d) contact with water, rain, sand, dirt, extreme humidity or heat, heavy perspiration; (e) the use of other brand accessories.
6. The warranty is valid in Hong Kong only.
7. Any repaired items not collected by customers within 2 months from the date of notice will be disposed of at the discretion of the company.
8. The warranty conditions are subject to change by the company without giving prior notice to customer.

CE6409 英文说明书 尺寸 535.5 X 255 MM

Uniden
Japan

MODEL:CE6409
OWNER'S MANUAL



PLEASE READ BEFORE USE

1 Getting Started

Welcome

Thank you for purchasing a Uniden CE6409

NOTE: Illustrations in this manual are used for explanation purposes. Some illustrations in this manual may differ from the actual unit.

Features Review

- Big Button & Big Display
- FSK / DTMF Caller ID
- 68 Caller ID* Log
- 2 Direct Memory
- Speaker Phone
- Last Number Redial
- 10 Two-touch Memory
- Mute Function
- Flash Time (100/300/600ms)
- No Battery Required
- Tone / Pulse Dialing
- Desk / Wall Mountable

Note: Caller ID requires subscription to your local telephone company.



Accessories (included)

1. Base unit
2. Handset
3. Telephone line cord
4. Handset cord
5. User manual



NOTE: If you find any of the parts missing, please contact your local shop where you buy this product at once.

Function Keys

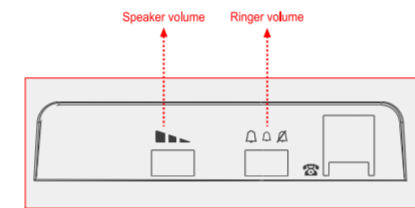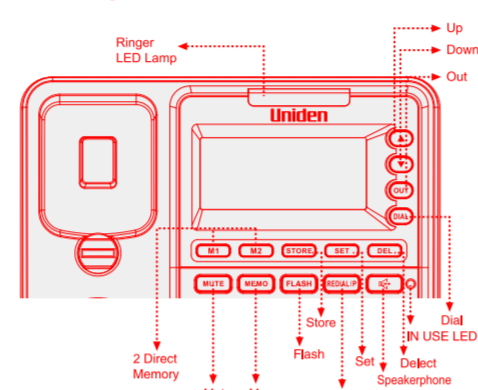

LCD Display Layout



- 1 00:00:00 Date, time
- 2 00:00 IN 00 Incoming call
- 3 NEW REP MAIL New call, repeat, mail
- 4 SUN MON TUE WED THU FRI SAT Week display
- 5 00000000000000000000 Phone number display

2 Settings

Setting The Phone

There are 4 options to set:

SEE 1 DATE Date and Time Setting.


SEE 2 PCODE PCODE is a prefix code that user may add to the front of the number before dialing.

SEE 3 T-P Select the dialing mode. This is dependent of the telephone company you are connected to.


SEE 4 FLASH Timing setting. This timing is to allow user to momentary access telephone services such as call waiting when FLASH button is pressed.

2 Settings


Setting DATE/TIME

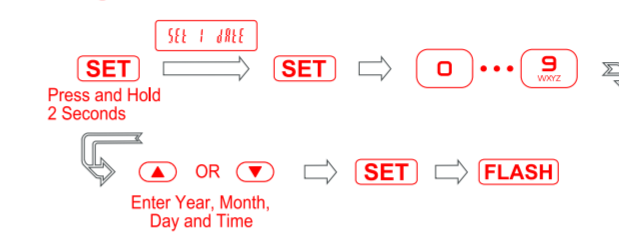


Setting PCODE

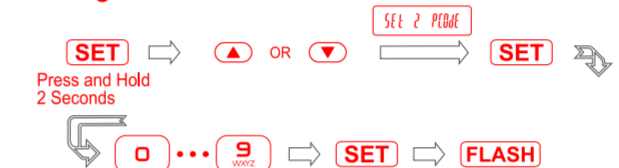

Setting TONE/PULSE

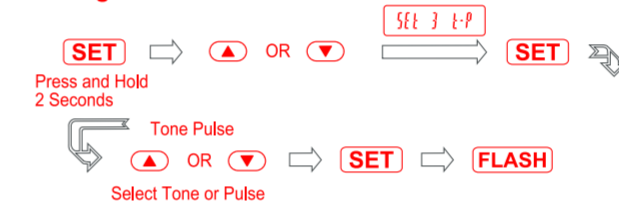


Setting FLASH


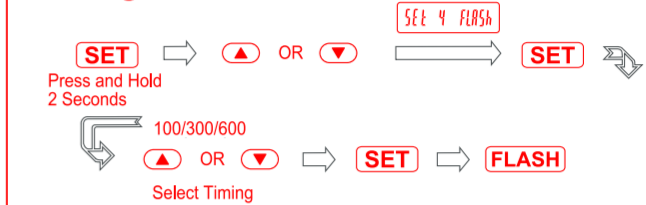


3 Operation

RECEIVING A PHONE CALL

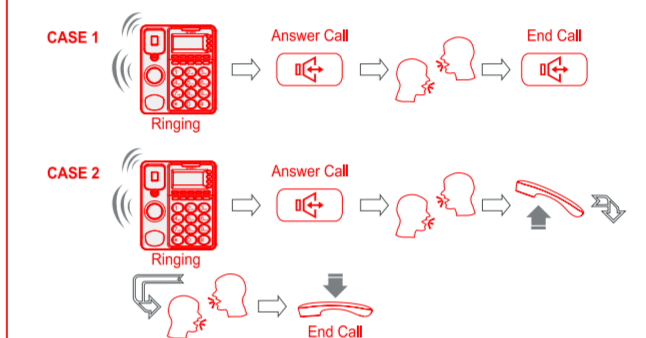

3 Operation

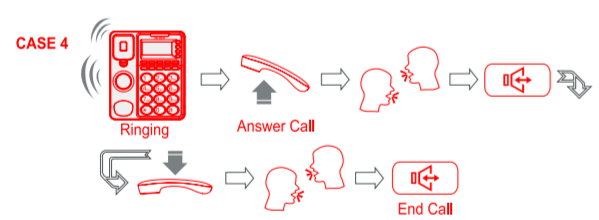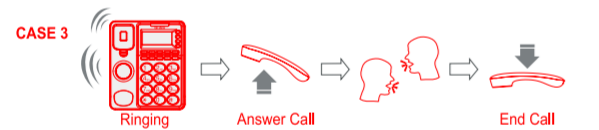


MAKING A PHONE CALL



CONTRAST LEVEL ADJUSTMENT

In on-hook state, press the "MUTE" button to adjust the display contrast level.

P=>T DIAL MODE In PULSE dialing mode, press [*] button to access TONE service.

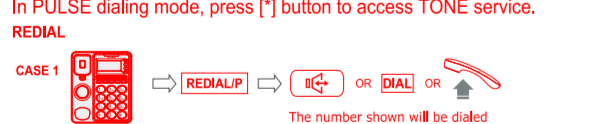

CONTRAST/MUTE
In off-hook state, user can press the "MUTE" button to access mute function. When CONTRAST/MUTE is on, the CONTRAST/MUTE indicator will show on the screen. Press the "MUTE" button to exit mute function and resume normal conversation.
In on-hook state, user can press the "MUTE" button to select the LCD Contrast (1 ~ 5 choice, default is 3).



CALLER ID FEATURES

Caller ID (CID) is a service available from your local company. For Caller ID to work on this system, you must subscribe to Caller ID service. This unit can receive Caller ID without any setting. Your Caller ID information may include the phone number, date and time.

REVIEWING INCOMING CALLS



DIAL BACK A CALLER ID NUMBER

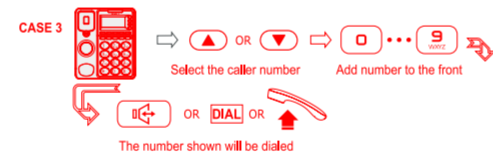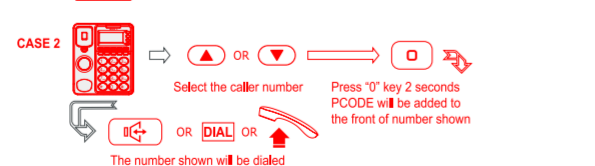

REVIEWING OUTGOING NUMBERS



DIAL BACK AN OUTGOING NUMBER



DELETING A CALLER ID NUMBER




MEMORY OPERATIONS



STORING OUTGOING NUMBERS INTO MEMORY



DIALING A MEMORY LOCATION



DELETING A MEMORY LOCATION



RINGER VOLUME LEVEL

- You may select ringer volume level on high / low / off.

FLASH

- During conversation, pressing Flash button will momentarily interrupt the telephone conversation to access telephone company services.

For sales and service in Asia
Contact : info@ustel.com.hk

4 WARRANTY CARD

18.COM Electronics Pte Ltd. WARRANTY CARD

Name: _____

Contact No./Tel: _____

Model: _____

Date Of Purchase: _____

Serial No: _____

Dealer's Stamp: _____

Service Centre:
Monday- Friday Opening Hours
9:30am - 12:30pm, 2:00pm - 5:00pm
Tel: 6278 8274

CUSTOMER'S COPY : DO NOT MAIL THIS

1. This warranty starts on the date of purchase and expires in 1 year. Customer must bring along this warranty card and original invoice or receipt together with the complete product for any repair services.
2. Any warranty application with no invoice and/or warranty card are regarded as invalid warranty. Customer must pay for repair charges.
3. This Warranty is invalid if the product has been modified, altered and /or repaired by persons other than technician of our company or mishandled by customer.
4. This warranty is applicable to Singapore only.
5. This warranty does not cover damages caused by natural disasters such as flooding and lightning etc.
6. Customers are requested to collect repaired unit within two months from date of submission. Units not collected after 6 months will be disposed off by the company.

18.COM Electronics Pte Ltd, 159 Sin Ming Road, Amtech Building,
#04-01, Singapore 575625